


# VEHICLE SPECIFIC SHEET

## #5014 MUGEN MBX5 KIT DIAGRAM

FIGURE 14

#55-5014D-1  
8/2008

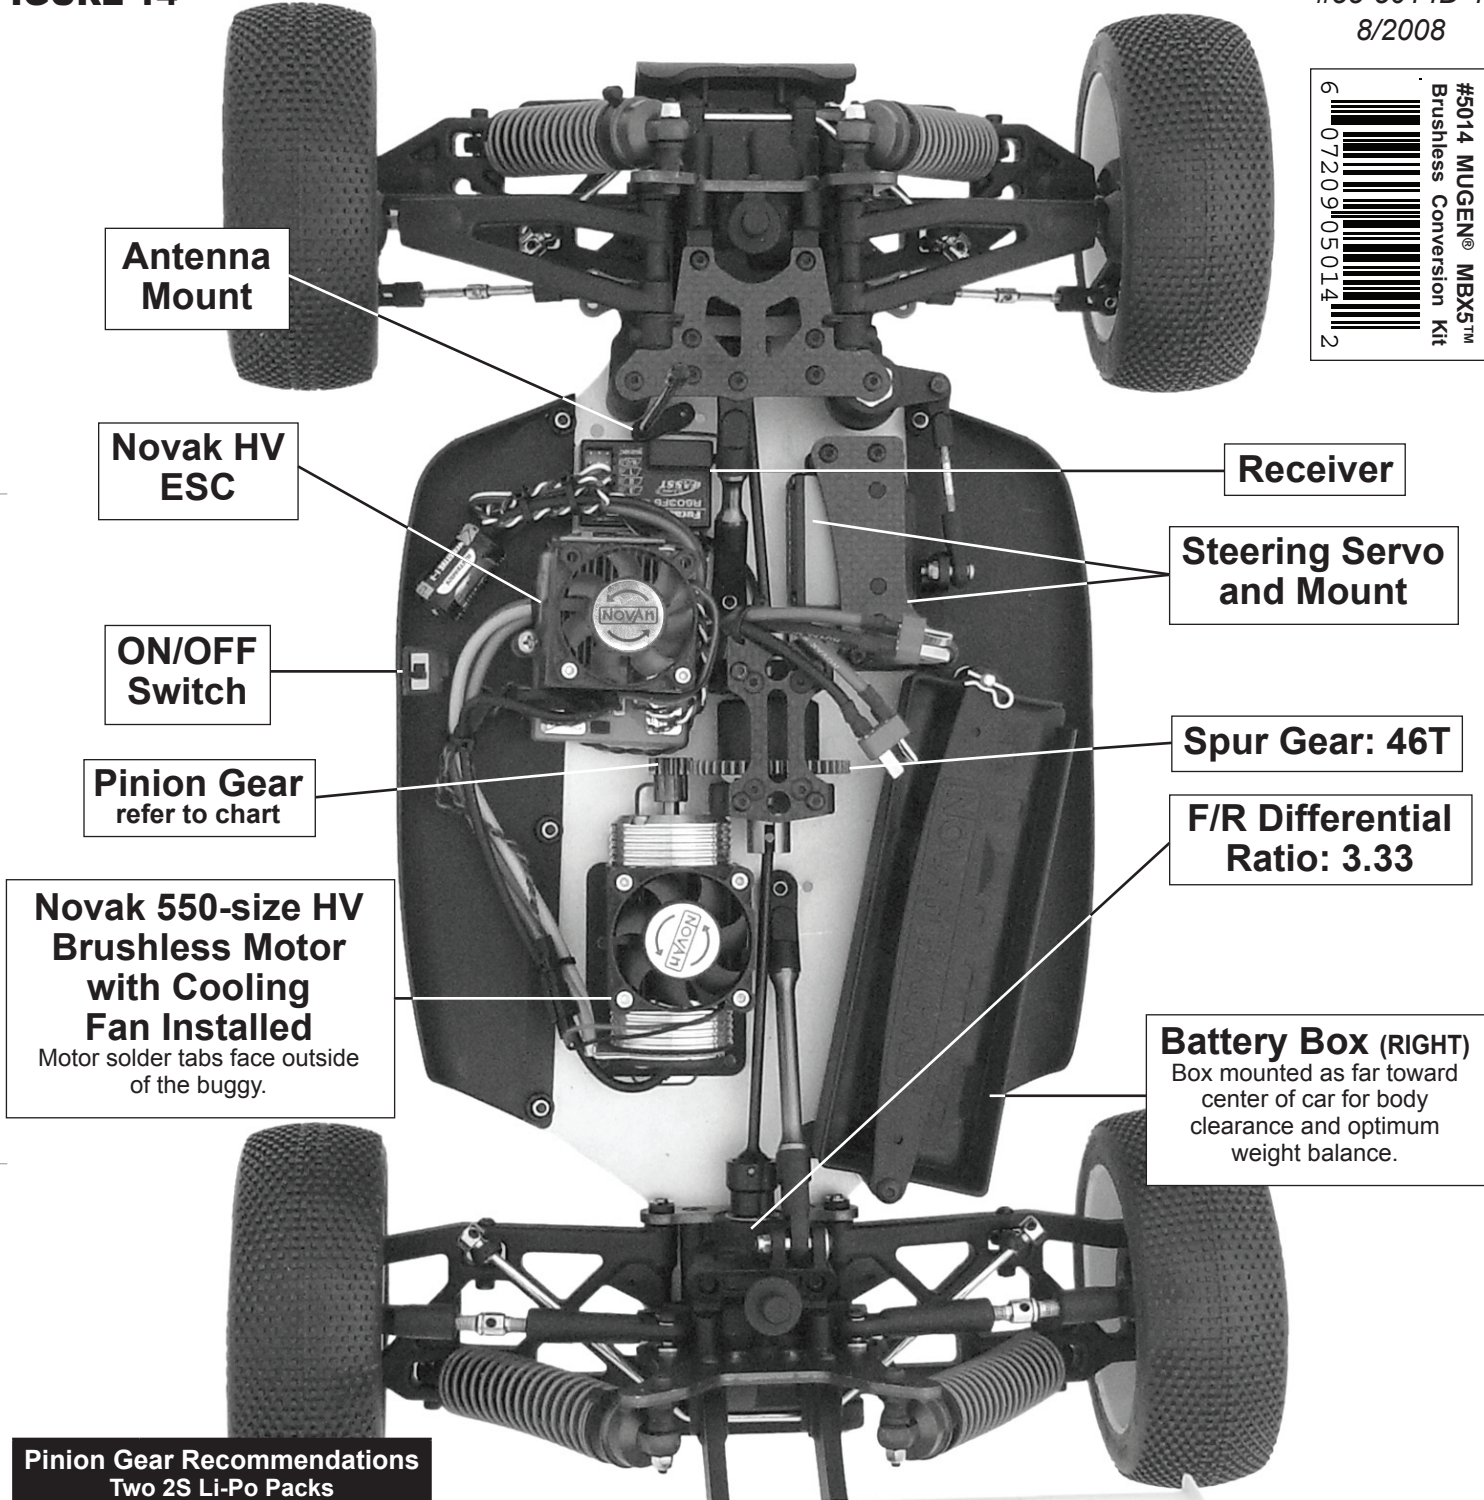

### Pinion Gear Recommendations Two 2S Li-Po Packs

Motor	Mod 1 Pinion Gear	
HV4.5	For speed runs only. Use biggest pinion gear.	
HV5.5	10T	Novak #5110
HV6.5	11T	Novak #5100
HV7.5	12T	Novak #5101

Motor operating temperature is the ONLY way to set vehicle gearing. The motor and ESC should not exceed 160-170° F MAX at end of run.

MBX5™ is a registered trademark of Mugen®.



**NOVAK ELECTRONICS, INC.**  
[www.teamnovak.com](http://www.teamnovak.com)

©2008 Novak Electronics, Inc. • All Rights Reserved •  
No part of these instructions may be reproduced without the written permission of Novak Electronics, Inc.